


Conveyor chains


M series

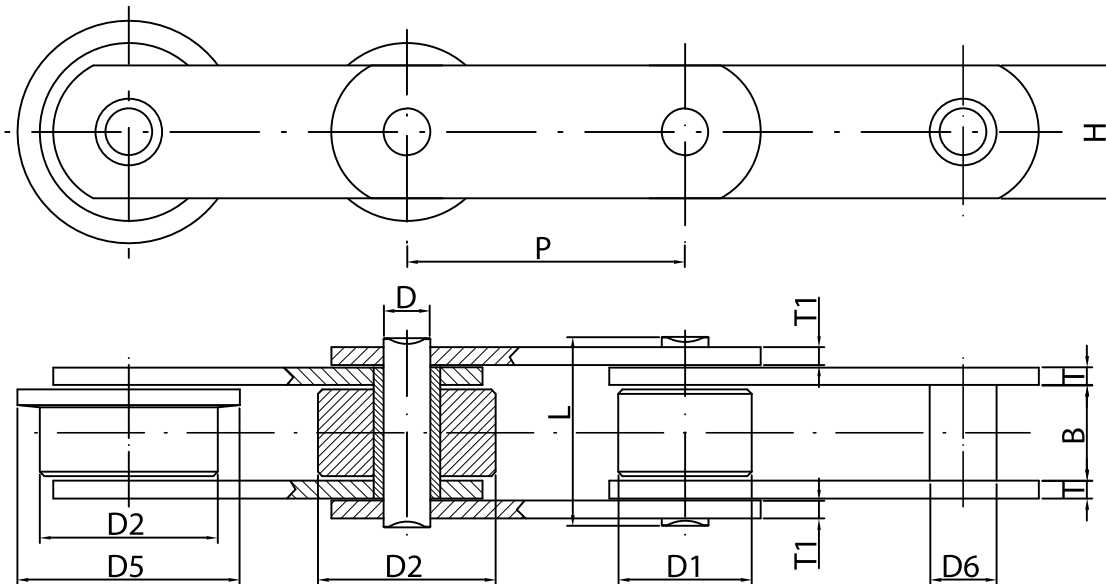

Reference	Standard pitches						Inner width	Bush diameter	Rollers			Plates		Pins		Breaking load
									small	big	flange	width	thickness	diameter	Lenght	
ISO	P*						B min	D6	D1	D2	D5	H	T/T1	D	L max	Q min
	mm						mm	mm	mm	mm	mm	mm	mm	mm	mm	KN
M-20	40	50	63	80	100	125	16	9	12,5	25	30	18	2,5	6	31	20
M-28	50	63	80	100	125	160	18	10	15	30	36	20	3	7	35	28
M-40	63	80	100	125	160	200	20	12,5	18	36	42	25	4/3	8,5	41	40
M-56	63	80	100	125	160	200	24	15	21	42	50	30	4	10	46	56
M-80	80	100	125	160	200	250	28	18	25	50	60	35	5	12	55	80
M-112	80	100	125	160	200	250	32	21	30	60	70	40	6	15	64	112
M-160	100	125	160	200	250	315	37	25	36	70	85	50	7	18	74	160
M-224	125	160	200	250	315	400	43	30	42	85	100	60	8	21	85	224
M-315	160	200	250	315	400	500	48	36	50	100	120	70	10	25	100	315
M-450	200	250	315	400	500	630	56	42	60	120	140	80	12	30	118	450
M-630	250	315	400	500	630	800	66	50	70	140	170	100	15	36	138	630
M-900	250	315	400	500	630	800	78	60	85	170	210	120	15	44	160	900

* Other pitches upon request


Conveyor chains with attachments M series

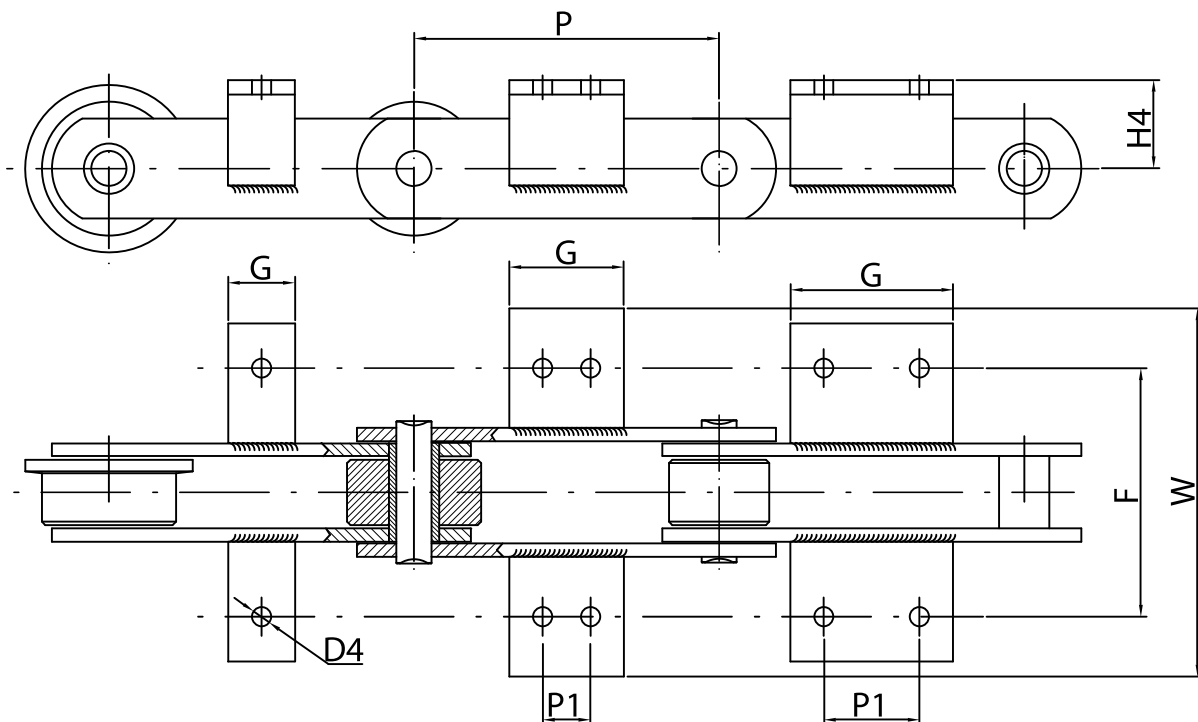

Reference	Attachment height	Distance between holes	Total width	Hole diameter	1 hole		2 holes									Iron angle
					P min	G	short			normal			long			
							P min	P1	G	P min	P1	G	P min	P1	G	
ISO	H4	F	W max	D4	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
M-20	16	54	78	6,6	40	14	63	20	35	80	35	50	100	50	65	L25x3
M-28	20	64	92	9	50	20	80	20	45	100	40	60	125	65	85	L30x3
M-40	25	70	116	9	63	20	80	20	40	100	40	60	125	65	85	L40x4
M-56	30	88	132	11	63	22	100	25	50	125	50	75	160	85	110	L45x4
M-80	35	96	150	11	80	22	125	50	75	160	85	110	200	125	150	L50x5
M-112	40	110	180	14	80	28	125	35	65	160	65	95	200	100	130	L60x6
M-160	45	124	210	14	100	30	160	50	80	200	85	115	250	145	175	L70x7
M-224	55	140	240	18	125	35	200	65	100	250	125	160	315	190	225	L80x8
M-315	65	160	290	18	160	35	200	50	85	250	100	135	315	155	190	L100x10
M-450	75	180	350	18	200	40	250	85	125	315	155	195	400	240	280	L120x12
M-630	90	230	370	24	250	50	315	100	150	400	190	240	500	300	350	L120x12
M-900	110	280	440	30	250	60	315	65	125	400	155	215	500	240	300	L150x15

Conveyor chains


MT series

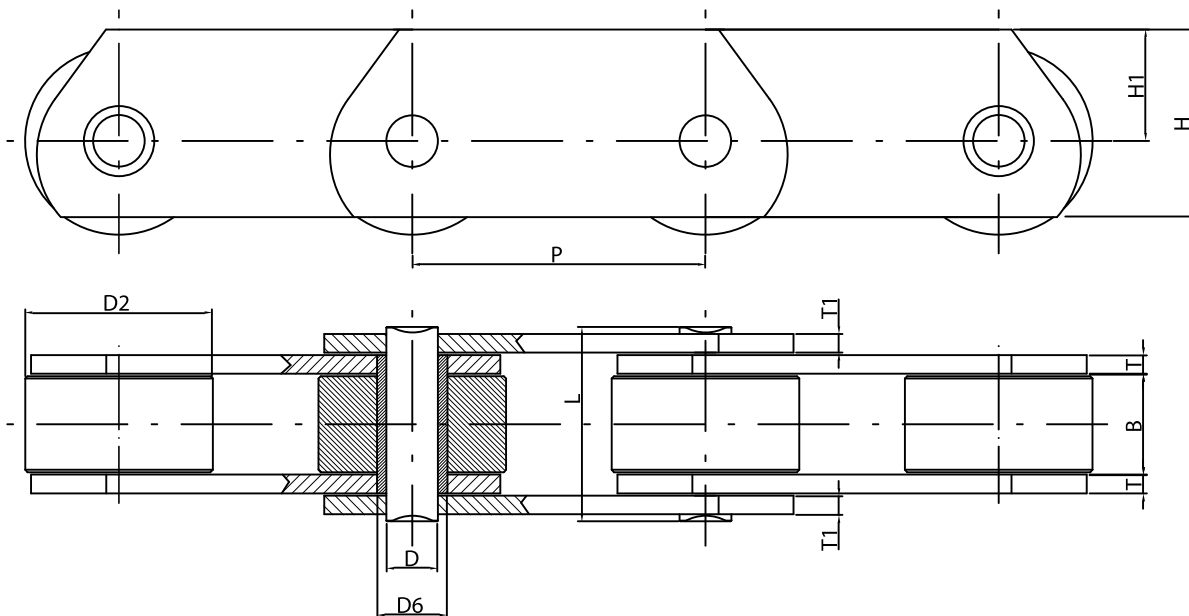

Reference	Standard pitches							Inner with	Bush diameter	Roller	Plates			Pins		Breaking load
											width	deep	thickness	diameter	length	
ISO	P*							B min	D6	D2	H	H1	T/T1	D	L max	Q min
	mm							mm	mm	mm	mm	mm	mm	mm	mm	KN
MT20	40	50	63	80	100	125	160	16	9	25	25	16	2,5	6	31	20
MT28	50	63	80	100	125	160	200	18	10	30	30	20	3	7	35	28
MT40	63	80	100	125	160	200	250	20	12,5	36	35	22,5	4/3	8,5	41	40
MT56	63	80	100	125	160	200	250	24	15	42	45	30	4	10	46	56
MT80	80	100	125	160	200	250	315	28	18	50	50	32,5	5	12	55	80
MT112	80	100	125	160	200	250	315	32	21	60	60	40	6	15	64	112
MT160	100	125	160	200	250	315	400	37	25	70	70	45	7	18	74	160
MT224	125	160	200	250	315	400	500	43	30	85	90	60	8	21	85	224
MT315	160	200	250	315	400	500	630	48	36	100	100	65	10	25	100	315
MT450	-	200	250	315	400	500	630	56	42	120	120	80	12	30	118	450
MT630	-	200	250	315	400	500	630	66	50	140	140	90	15	36	138	630
MT900	-	-	250	315	400	500	630	78	60	170	180	120	15	44	160	900

* Other pitches upon request

Conveyor chains MC series

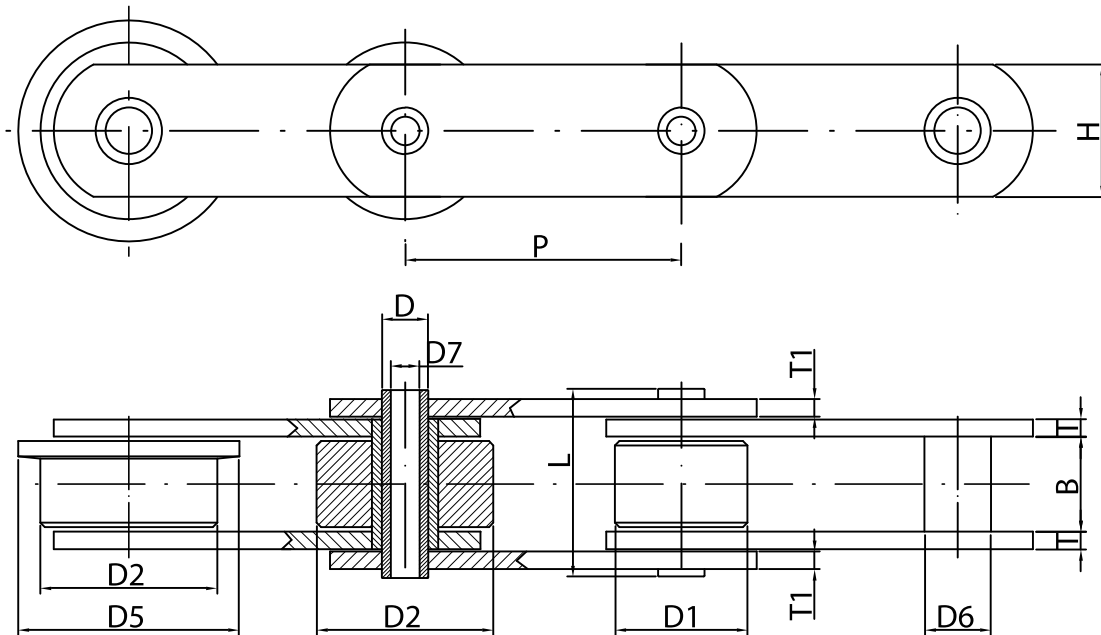

Reference	Standard pitches					Inner width	Bush diameter	Rollers			Plates		Pins			Breaking load
								small	big	flange	width	thickness	outer diameter	inner diameter	length	
ISO	P*					B min	D6	D1	D2	D5	H	T/T1	D	D7 min	L max	Q min
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	KN
MC-28	63	80	100	125	160	20	16	25	36	42	25	4/3	12	8,2	42	28
MC-56	80	100	125	160	200	24	20	30	50	60	35	4	16	10,2	46,5	56
MC-112	100	125	160	200	250	32	30	42	70	85	50	6	22	14,3	64	112
MC-224	160	200	250	315	400	43	40	60	100	120	70	8	30	20,3	85	224

* Other pitches upon request